

Code: **MO1575XX** (Zone 1)

**1575 Litre Slimline Corrugated** – 350 gallons

Dimensions:	
Length:	1400mm
Diameter/Width:	820mm
Inlet Height:	1730mm
Total Height:	1800mm
Weight (approx.):	85kg

Tank is supplied standard with:	
1 x 200mm inlet strainer	
1 x 90mm overflow cap	
1 x 25mm (1") flush spinweld	
1 x 25mm (1") hex nipple BSP	
1 x 25mm (1") brass gate valve	

Standard fit out details:	
Inlet:	@ 3 o'clock – 200mm inlet strainer (no other location)
Overflow:	@ 9 o'clock (left side of tank) – 90mm overflow (no other location)
Outlet:	@ 3 o'clock (right side of tank) – 25mm flush spinweld, hex nipple with 25mm brass gate valve


Other fit out options:	
Inlet:	Inlet is always at 3 o'clock and overflow at 9 o'clock
Outlet:	@ 9 o'clock (left side of tank) – 25mm spinweld, hex nipple with 25mm brass gate valve

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank
- Made in any standard COLORBOND® roofing colours

\*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate



**STANDARD FITOUT**

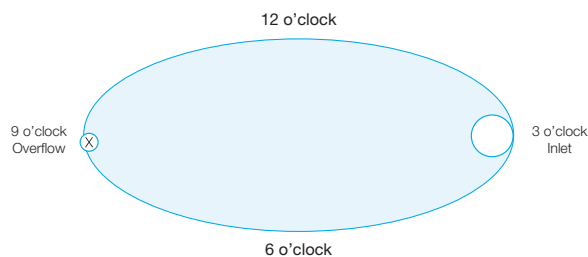

Tap not included with tank

Nylex Tanks is managed and certified to the ISO9001:2008 international Quality Management Systems standard and our tanks are manufactured in Australia using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

