

Code: **MO2000XX** (Zone 1 & Zone 2)

2000 Litre Slimline Corrugated – 440 gallons

Dimensions:	
Length:	2100mm
Diameter/Width:	860mm
Inlet Height:	1650mm
Total Height:	1680mm
Weight (approx.):	125kg

Tank is supplied standard with:	
1 x 300mm inlet strainer	
1 x 90mm overflow cap	
1 x 25mm (1") flush spinweld	
1 x 25mm (1") hex nipple BSP	
1 x 25mm (1") brass gate valve	

Standard fit out details:	
Inlet:	Centre – 300mm inlet strainer (no other location)
Overflow:	@ 9 o'clock (left side of tank) – 90mm overflow (no other location)
Outlet:	@ 3 o'clock (right side of tank) – 25mm spinweld, hex nipple with 25mm brass gate valve




- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank

Other fit out options:

- Inlet is always in the centre and overflow at 9 o'clock
- Outlet can be placed on opposite side @ 9 o'clock
- Made in any standard COLORBOND® roofing colours

STANDARD FITOUT

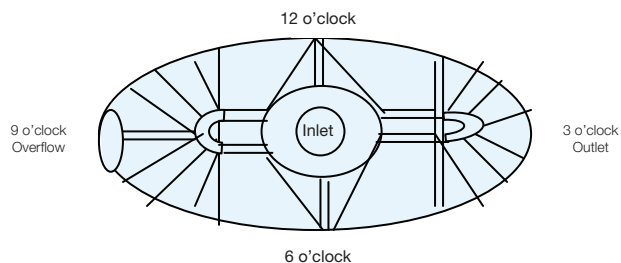

Tap not included with tank

*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate

Nylex Tanks is managed and certified to the ISO9001:2015 International Quality Management Systems standard.

All Nylex tanks are manufactured in Australia to the Australian Polyethylene tank standard using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

