

Code: **NT1100XXSLIM** (Zone 1 & Zone 2)

**1100 Litre Slimline** – 240 gallons

Dimensions:	
Length:	1220mm
Width/Diameter:	620mm
Inlet Height:	2010mm
Total Height:	2010mm
Weight (approx.)	65kg

Tank is supplied standard with:	
1 x 300mm inlet strainer	
1 x 90mm overflow	
1 x 90mm overflow cap	
1 x 25mm brass gate valve	
1 x 25mm flush springweld	
1 x 25mm hex nipple	


Standard fit out details:	
Inlet:	@ centre of tank – 300mm inlet strainer
Overflow:	@ 2 o'clock – 90mm overflow
Outlet:	@ 8 o'clock – 25mm spinweld, hex nipple, 25mm brass gate valve

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank

#### Other fit out options:

- Inlet is always at 12 o'clock
- Please note outlets and overflows can only be positioned at 10 to 2 and, 4 to 8 o'clock
- No fittings placed at 3 or 9 o'clock due to the curvature of tank
- Please mark 1 x overflow & 2 outlets
- Made in any standard COLORBOND® roofing colours

\*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate

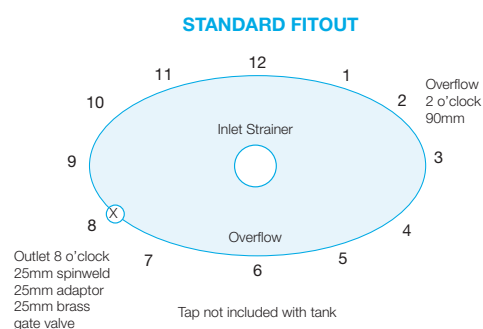

Nylex Tanks is managed and certified to the ISO9001:2008 international Quality Management Systems standard and our tanks are manufactured and certified to Australian Polyethylene tank standard AS/NZS4766:2006.

All Nylex tanks are manufactured in Australia using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.



Quality  
ISO 9001  
SAI GLOBAL  
OEC24048



Australian  
Standard  
AS/NZS 4766:2006  
SAI GLOBAL  
SAI GLOBAL