

Code: **NT1600XXSLIM** (Zone 2)

1600 Litre Slimline – 350 gallons

| Dimensions: | |
|-------------------|--------|
| Length: | 1500mm |
| Width/Diameter: | 800mm |
| Inlet Height: | 1850mm |
| Total Height: | 1920mm |
| Weight (approx.): | 88kg |


| Tank is supplied standard with: | |
|---------------------------------|--|
| 1 x 300mm inlet strainer | |
| 1 x 90mm overflow | |
| 1 x 90mm overflow cap | |
| 1 x 25mm brass gate valve | |
| 1 x 25mm flush spinweld | |
| 1 x 25mm hex nipple | |

| Standard fit out details: | |
|---------------------------|---|
| Inlet: | @ centre of tank – 300mm inlet strainer |
| Overflow: | @ 2 o'clock – 90mm overflow |
| Outlet: | @ 8 o'clock – 25mm spinweld, hex nipple, with 25mm brass gate valve |

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank

Other fit out options:

- Inlet is always centre of tank
- Please note outlets and overflows can only be positioned at 10 to 2 and, 4 to 8 o'clock
- No fittings placed at 3 or 9 o'clock due to the curvature of tank
- Please mark 1 x overflow & 2 outlets
- Made in any standard COLORBOND® roofing colours

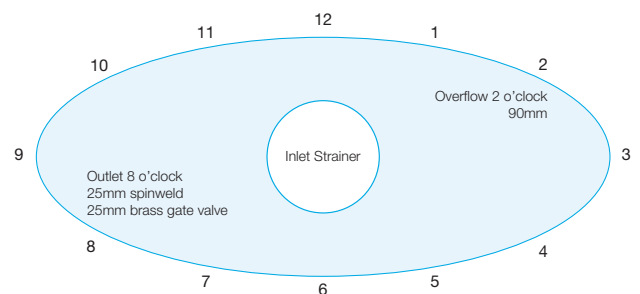

*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate

Nylex Tanks is managed and certified to the ISO9001:2008 international Quality Management Systems standard and our tanks are manufactured and certified to Australian Polyethylene tank standard AS/NZS4766:2006.

All Nylex tanks are manufactured in Australia using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

