

Code: **NT2000XXCOOL** (Zone 1 & Zone 2)

**2000 Litre Coolibah** – 440 gallons

Dimensions:	
Length:	2000mm
Width/Diameter:	699mm
Inlet Height:	2070mm
Total Height:	2070mm
Weight (approx.):	100kg

Tank is supplied standard with:	
1 x 400mm inlet strainer	
1 x 90mm overflow	
1 x 90mm overflow cap	
1 x 25mm spinweld	
1 x 25mm plug	
1 x 25mm spinweld	
1 x 25mm brass gate valve	
1 x 25mm spinweld for pump suction line	
NB: 5 o'clock spinweld represents location of pump suction line	
1 x Sheet metal base formed Coolibah plus	
1 x Coolibah plate cover	
1 x T30-T25: – Torque bit (Allen key)	

Standard fit out details:	
Inlet:	@ 12 o'clock – 400mm inlet strainer
Overflow:	@ 9 o'clock – 90mm overflow (LHS)
Outlet:	@ 9 o'clock – 25mm spinweld, hex nipple, with 25mm brass gate valve
Outlet:	@ 3 o'clock – 25mm spinweld 400mm up from base with 25mm plug
Outlet:	@ 5 o'clock – 25mm spinweld for pump suction line


- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank
- Made in any standard COLORBOND® roofing colours

\*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate



#### Can be supplied with: (at extra charge):

- Either**
- Davey KRB1: Rainbank - HP45-05 (SS)
  - Davey KRB2: Rainbank - HS50-05 (DS)
- Or:**
- 805127: RS6-INOX45S2MPCX
  - 804717: RS6-JETCOM82MPC20 (DS)

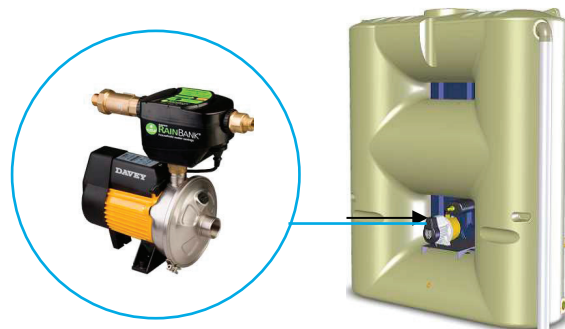

Nylex Tanks is managed and certified to the ISO9001:2015 International Quality Management Systems standard.

All Nylex tanks are manufactured in Australia to the Australian Polyethylene tank standard using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

