

Code: **NT330XXSLIM** (Zone 1 & Zone 2)

330 Litre Slimline – 75 gallons

Dimensions:	
Length:	1000mm
Width/Diameter:	400mm
Inlet Height:	1050mm
Total Height:	1050mm
Weight (approx.):	25kg


Tank is supplied standard with:	
1 x 300mm inlet strainer	
1 x 50mm overflow	
1 x 50mm overflow strainer cap only	
1 x 25mm (1") flush spinweld	
1 x 25mm (1") hex nipple BSP	
1 x 25mm brass gate valve	

Standard fit out details:	
Inlet:	@ 12 o'clock – 300mm inlet strainer
Overflow:	@ 9 o'clock - 50mm overflow
Outlet:	@ 9 o'clock – 25mm spinweld, hex nipple with 25mm brass gate valve

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank

Other fit out options:

- Made in any standard COLORBOND® roofing colours

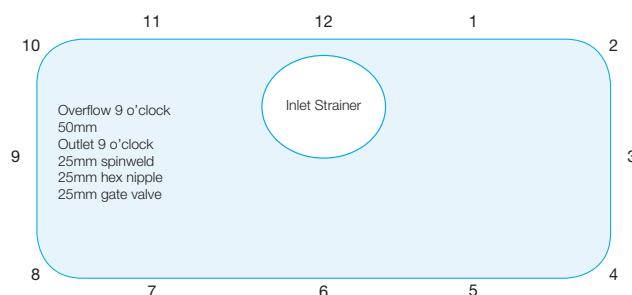

*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate

Nylex Tanks is managed and certified to the ISO9001:2008 international Quality Management Systems standard and our tanks are manufactured and certified to Australian Polyethylene tank standard AS/NZS4766:2006.

All Nylex tanks are manufactured in Australia using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

