

Code: **NT600XX SLIM** (Zone 1 & Zone 2)

**600 Litre Slimline** – 130 gallons

| Dimensions:       |        |
|-------------------|--------|
| Length:           | 1220mm |
| Width/Diameter:   | 620mm  |
| Inlet Height:     | 1220mm |
| Total Height:     | 1260mm |
| Weight (approx.): | 35kg   |

| Tank is supplied standard with: |  |
|---------------------------------|--|
| 1 x 300mm inlet strainer        |  |
| 1 x 90mm over flow              |  |
| 1 x 90 mm overflow cap          |  |
| 1 x 25mm brass gate valve       |  |
| 1 x 25mm flush spinweld         |  |
| 1 x 25mm hex nipple             |  |


| Standard fit out details: |   |
|---------------------------|---|
| Inlet:                    | @ centre of tank – 300mm inlet strainer                           |
| Overflow:                 | @ 10 o'clock – 90mm overflow                                      |
| Outlet:                   | @ 8 o'clock – 25mm spinweld, 25mm brass gate valve (base of tank) |

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank

NB: Inlet is always at centre of tank.

#### Other fit out options:

- Made in any standard COLORBOND® roofing colours

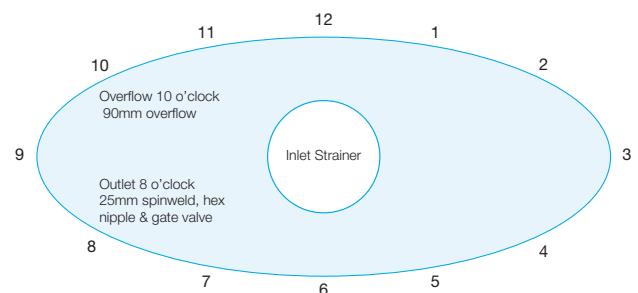

\*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate

Nylex Tanks is managed and certified to the ISO9001:2015 International Quality Management Systems standard.

All Nylex tanks are manufactured in Australia to the Australian Polyethylene tank standard using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

