

Code: **NT600XX SLIM** (Zone 1 & Zone 2)

600 Litre Slimline – 130 gallons

Dimensions:

Length:	1220mm
Width/Diameter:	620mm
Inlet Height:	1220mm
Total Height:	1260mm
Weight (approx.):	35kg

Tank is supplied standard with:

1 x 300mm inlet strainer
1 x 90mm over flow
1 x 90 mm overflow cap
1 x 25mm brass gate valve
1 x 25mm flush spinweld
1 x 25mm hex nipple

Standard fit out details:


Inlet:	@ centre of tank – 300mm inlet strainer
Overflow:	@ 10 o'clock – 90mm overflow
Outlet:	@ 8 o'clock – 25mm spinweld, 25mm brass gate valve (base of tank)

- When no fit out is nominated standard fit out will be supplied
- Bucket tap not included with tank

NB: Inlet is always at centre of tank.

Other fit out options:

- Made in any standard COLORBOND® roofing colours

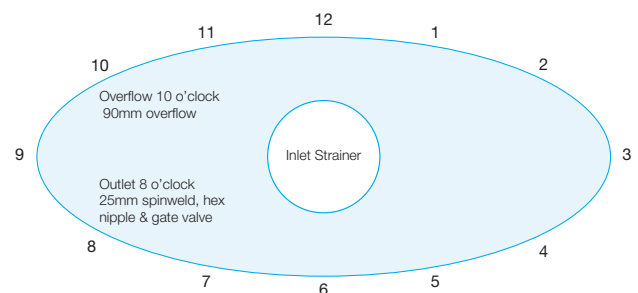

*Dimensions of our tanks can vary slightly due to shrinkage variations. All dimensions are approximate

Nylex Tanks is managed and certified to the ISO9001:2008 international Quality Management Systems standard and our tanks are manufactured and certified to Australian Polyethylene tank standard AS/NZS4766:2006.

All Nylex tanks are manufactured in Australia using UV stabilised Polyethylene complying with AS/NZS 4020 and AS/NZS 2070.

